RevNo	Revision note	Date	Signature	Checked

Grease Guardian®
Sustainable Grease Management

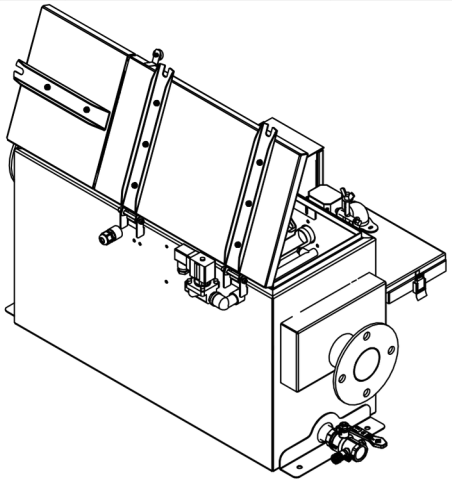

ISO BACK

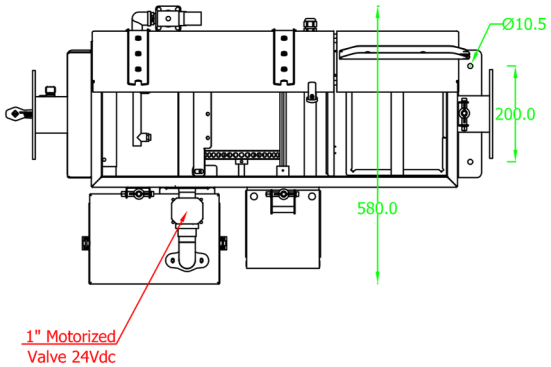

FRONT ELEVATION

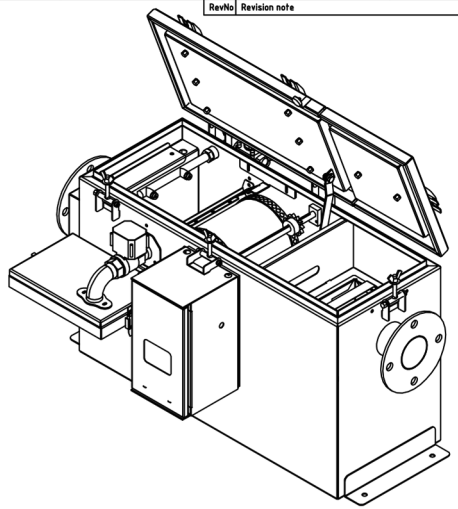

ISO FRONT

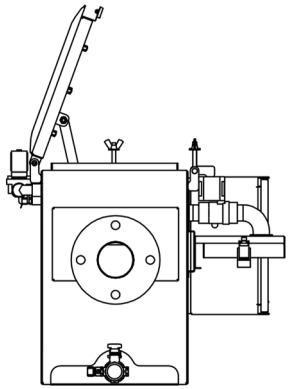

END - OUTLET

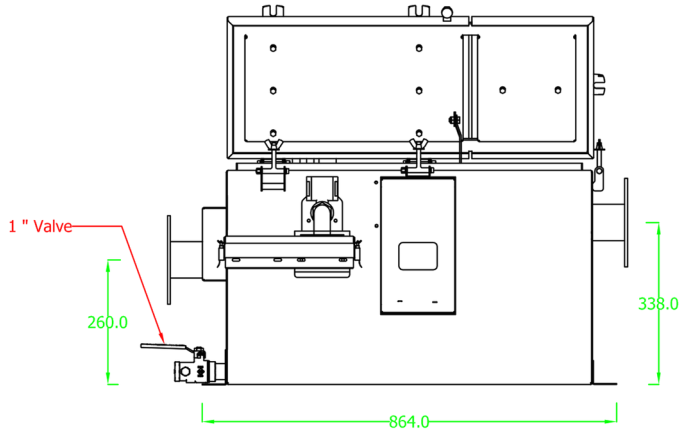

FRONT ELEVATION

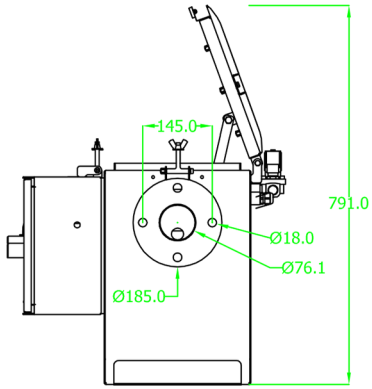

END - INLET

Notes

1. Inlet and Outlet are for DN65 PN16 flanges
2. Desludging point is via 1" FF Valve QT
3. A motorised 24V ac valve closes the passage of the oil
4. The motorised valve opens when the unit is in skimming operation
5. Lids are marine type completely sealed
7. Standard material used is SS316 in 2.0mm thickness
9. Washing to be provided with hot water (preferably) at 3ATM
10. 230V operating voltage

STOCK CODE: MGD4

Grease Guardian D4 Marine Configuration

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference
Designed by C.Attard	Checked by G.Giorgino	Approved by – date	Filename MU	Date 12-12-2018	Scale 1:1
FM Environmental (Malta) Ltd.			D4M		
				Edition 0	Sheet 1/1