GREASE GUARDIAN GGX 150 (up to 150 GPM pump assisted)

Dimensional Data

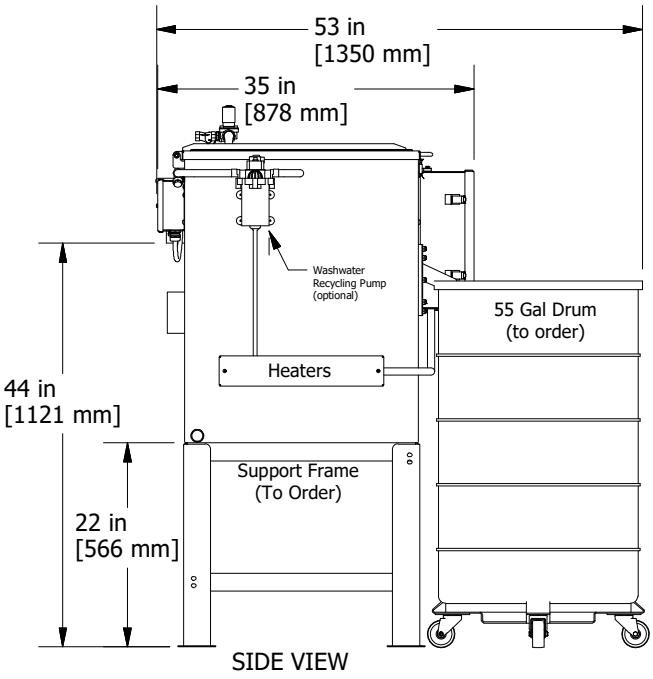

SIDE VIEW

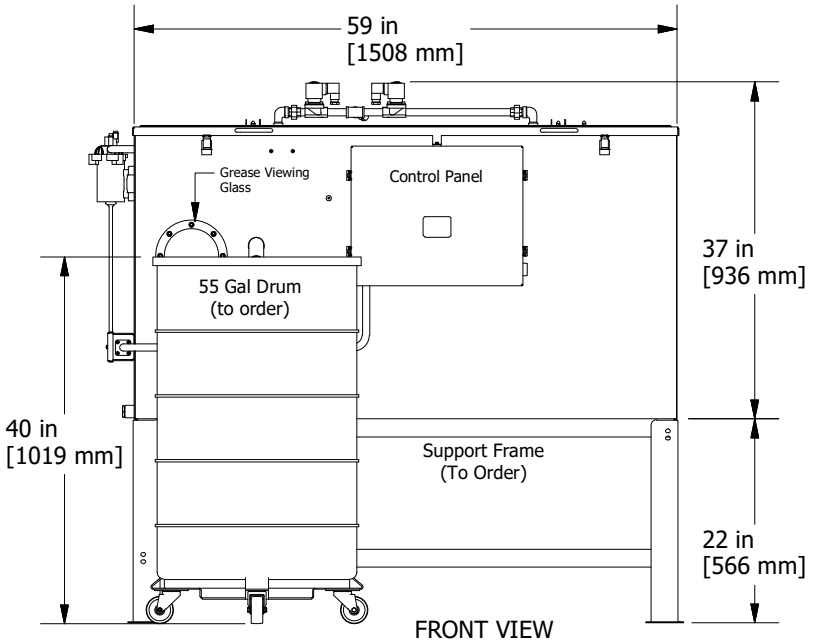

FRONT VIEW

KEY INSTALLATION NOTES

- **Allow for the minimum clearances shown**
- **Allow 63" x 40" for tank and container base**
- **Allow adequate space for grease container**
- **Inlet port is uni-directional (single)**
- **Outlet port is uni-directional (single)**
- **Keep outlet piping at 1/8" per foot or greater**
- **Use rubber pipe connections provided**
- **Only switch on after filling with water**
- **Refer to full manual for full instructions**

HOT WATER SUPPLY OPTIONAL CONNECTION

- **1/2'' incoming hot water pipe**
- **Backflow Prevention**
- **Water hammer arrestor**
- **Wye Strainer**

RECYCLED WATER SUPPLY OPTIONAL CONNECTION

- **Tank mounted water recycling pump**
- **Wye Strainer**

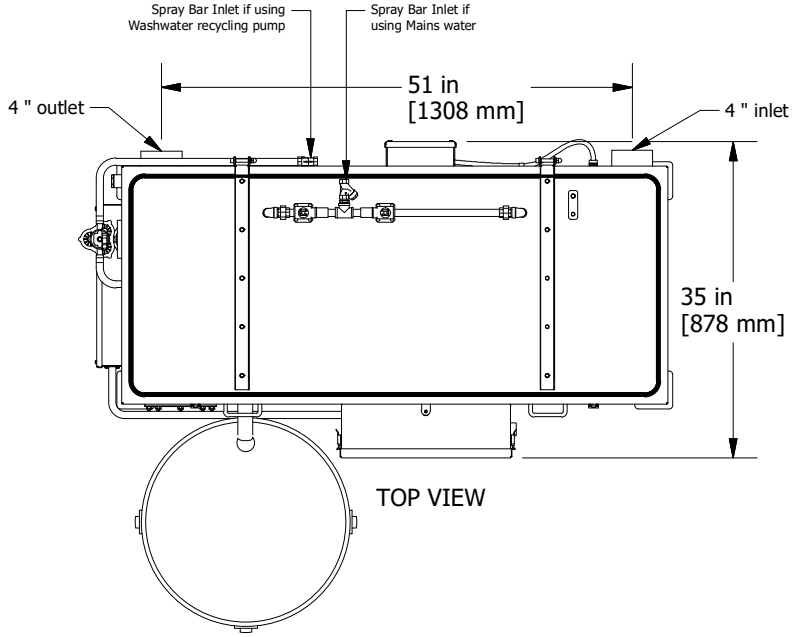

TOP VIEW

PRE-START UP CHECKS

- **Ensure unit is positioned on a level surface and is plumbed securely**
- **Ensure electrical outlet is fitted with dedicated ground fault circuit breaker**
- **Ensure unit is filled with water to the correct level**
- **Ensure Main Lid is fully closed**
- **Set PLC date and time as detailed in the manual**
- **Ensure the grease container is empty and secured in place**